



SWANCORP




iGO Standard and iGO Deluxe

✓ Easy
✓ Efficient
✓ Effective



'it ticks all the right boxes'

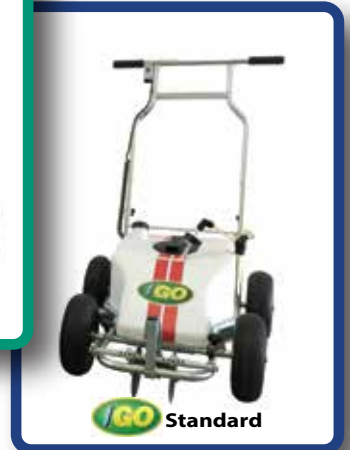

The choice of champions

The iGO range was developed to provide the professional with a machine that was more than just 'Fit for purpose'. Rigorous trials with specialist grounds staff, from major football clubs and local authorities, helped in the creation of a line marking system that far exceeded the standard for existing pedestrian machines. The machines are easy to set up, operate, clean, and service, saving time and money.

With easy to use accessories, specifically developed for the iGO range, athletic lane marking and application of grass treatments are simple and effective.

The iGO machines are fitted with handle bar mounted, On / Off switches, heavy duty diaphragm pump, and 12V / 20AH re-chargable batteries as standard.

Additional benefits of the iGO Deluxe:



The Deluxe version features a solenoid triggered spray head. This enhances the atomisation of the paint compared to the standard diaphragm controlled spray head, to improve leaf coverage, without any increase in paint usage, and gives instant shut-off of paint to the spray head, eliminating over-spray at the end of the marked line.



Front disc lifters are fitted as standard to the iGO deluxe, and are operated from the lever on the handlebar. This allows the discs to be lifted clear of the ground, particularly useful when marking rugby pitches. When lifted, the discs can be held in position, if required, without the need to keep your hands on the lever.

Features standard to both machines:



Both machines are supplied with a sealed, 12 volt / 20AH re-chargable battery, which is designed to be easily charged, on or off, the machine. The 'intelligent' charger supplied, is designed to operate safely overnight.



A 2ltr water bottle is supplied, for use when priming and flushing out the system, at the end of day operations.



The disc bar benefits with having pre-drilled holes, set at 2", 3", 4", 5" and 6" (50,75,100,125 and 150mm) for ease of disc spacing. These are secured with easy lift index plungers.



The diaphragm pump delivers consistent pressure to the spray head, ensuring that the line is delivered efficiently, time after time.